

DC-96B

Condenser Microphone

Milab's DC-96B is a superb multi-purpose condenser microphone. It has a rectangular large membrane capsule with a cardioid pattern. The DC-96B provides a full-bodied, exceptionally clean sound with natural brightness.

The body of the DC-96B is made of solid brass, and connects with a standard 3-pin XLR connector. It is packaged in a black leatherette box and comes with a hard mount. An individual frequency curve is also included.



Specifications

Polar pattern: cardioid

Frequency response: 20 Hz to 20 kHz

Max SPL (1% THD @ 1 kHz): 120 dB

Sensitivity @ 1 kHz: 6 mV / Pa \pm 1 dB

A-weighted noise level (IEC 179-A): 19 DB

Power supply: 48 V \pm 4 V phantom

Current consumption: 0.6 mA

Output impedance: < 200 Ω

Minimum load impedance: 1 k Ω


Connector: 3-pin XLR

Length: 5.71" (145 mm)

Diameter: 1.06" (27 mm)

Weight: 7.05 oz. (200 g)

Frequency Chart: DC-96B

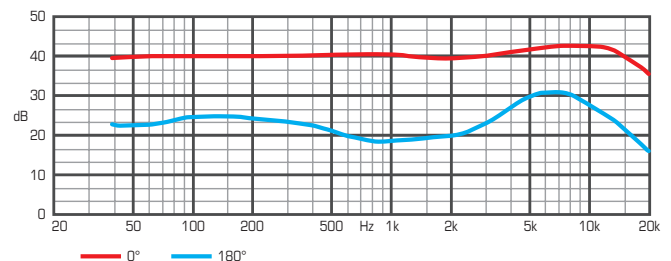

Exclusively distributed in the Americas by



9770 Silicon Prairie Pkwy • Madison, WI 53593-8442 USA
tel: 608-227-2040 • fax: 608-831-1890