

LSR-1000

Condenser Microphone

The LSR-1000 is a vocal condenser microphone designed for rugged life on the road and provides outstanding studio-quality sound on stage. It features a shock-absorbing rubber fitted capsule and built-in pop protection to eliminate most handling noise. The LSR-1000 has a cardioid polar pattern and can handle sound pressure levels (SPL) up to 132 dB.

The body of the LSR-1000 is solid brass and connects with a standard 3-pin XLR connector. It is packaged in a black leatherette box and comes with a hard mount. An individual frequency curve is also included.



Specifications

Polar pattern: cardioid

Frequency response: 40 Hz to 20 kHz

Max SPL (1% THD @ 1 kHz): 132 dB

Sensitivity @ 1 kHz: 7 mV / Pa \pm 1 dB

A-weighted noise level (IEC 179-A): 21 DB

Power supply: 12 - 52 V phantom

Current consumption: 4 mA

Output impedance: < 200 Ω

Minimum load impedance: 1 k Ω


Connector: 3-pin XLR

Length: 7.28" (185 mm)

Diameter: 0.94" / 1.85" (24 / 47 mm)

Weight: 10.41 oz. (295 g)

Frequency Chart: LSR-1000

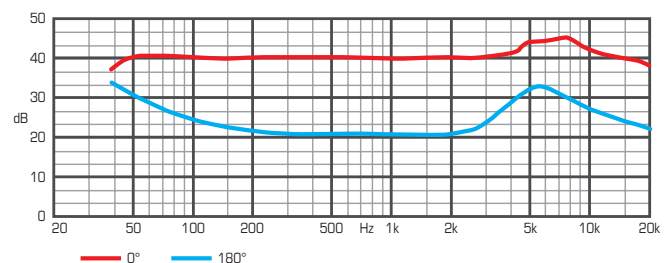

Exclusively distributed in the Americas by



9770 Silicon Prairie Pkwy • Madison, WI 53593-8442 USA
tel: 608-227-2040 • fax: 608-831-1890